



US011599865B2

(12) **United States Patent**
Fisher

(10) **Patent No.:** **US 11,599,865 B2**

(45) **Date of Patent:** ***Mar. 7, 2023**

(54) **METHOD AND SYSTEM FOR REMOTE TRANSACTION PROCESSING USING A NON-BROWSER BASED APPLICATION**

(71) Applicant: **Michelle Fisher**, Berkeley, CA (US)

(72) Inventor: **Michelle Fisher**, Berkeley, CA (US)

(73) Assignee: **Michelle Fisher**, Berkeley, CA (US)

(*) Notice: Subject to any disclaimer, the term of this patent is extended or adjusted under 35 U.S.C. 154(b) by 177 days.

This patent is subject to a terminal disclaimer.

(21) Appl. No.: **16/906,239**

(22) Filed: **Jun. 19, 2020**

(65) **Prior Publication Data**

US 2021/0035079 A1 Feb. 4, 2021

Related U.S. Application Data

(63) Continuation of application No. 15/822,131, filed on Nov. 25, 2017, now Pat. No. 10,692,063, which is a
(Continued)

(51) **Int. Cl.**
G06Q 20/20 (2012.01)
H04W 4/21 (2018.01)
(Continued)

(52) **U.S. Cl.**
CPC **G06Q 20/20** (2013.01); **G06Q 20/00** (2013.01); **G06Q 20/108** (2013.01); **G06Q 20/16** (2013.01);
(Continued)

(58) **Field of Classification Search**
CPC G06Q 20/00; G06Q 20/20; G06Q 20/32; G06Q 20/102; G06Q 20/105; G06Q 40/00;
(Continued)

(56) **References Cited**

U.S. PATENT DOCUMENTS

5,930,764 A * 7/1999 Melchione G06Q 30/02
705/7.29
6,018,654 A * 1/2000 Valentine H04W 8/245
455/414.4

(Continued)

FOREIGN PATENT DOCUMENTS

EP 1503352 7/2004
WO WO 2006095212 A1 9/2006

(Continued)

OTHER PUBLICATIONS

U.S. Appl. No. 15/076,578, Board Decision mailed Mar. 2, 2020, p. 7-9.


(Continued)

Primary Examiner — Olusegun Goyea

(57) **ABSTRACT**

A method and system for conducting an online payment transaction through a point of sale device. The method includes receiving input from a user selecting an item for purchase through the point of sale device; calculating a total purchase amount for the item in response to a request from the user to purchase the item; and sending payment authorization for the total purchase amount from the point of sale device to a payment entity, in which the payment authorization is sent to the payment entity via a mobile communication device of the user. The method further includes receiving a result of the payment authorization from the payment entity through the mobile communication device; and completing the payment transaction based on the result of the payment authorization.

40 Claims, 4 Drawing Sheets

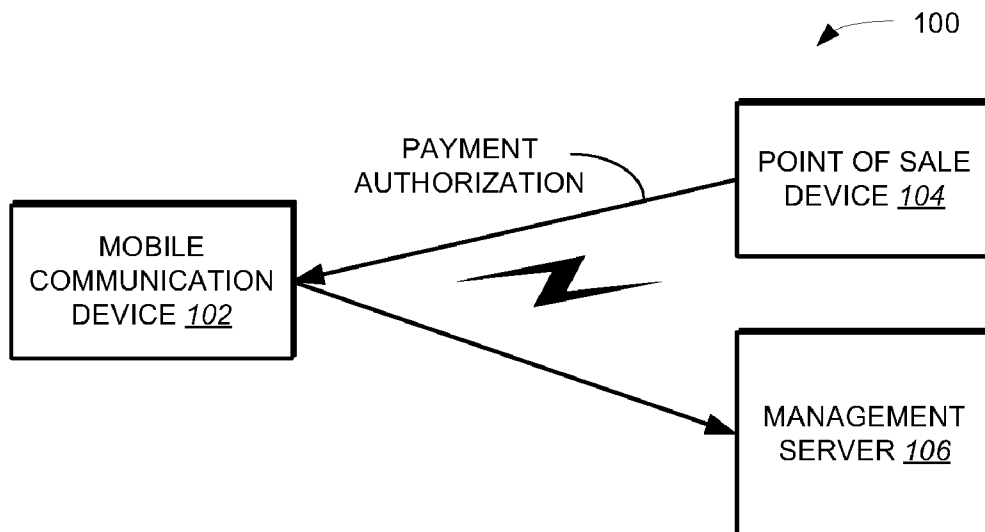

Related U.S. Application Data

continuation of application No. 14/686,695, filed on Apr. 14, 2015, now Pat. No. 9,836,731, which is a continuation of application No. 13/710,646, filed on Dec. 11, 2012, now Pat. No. 9,015,064, which is a continuation of application No. 11/948,903, filed on Nov. 30, 2007, now Pat. No. 8,352,323.

(51) Int. Cl.

G06Q 30/0207 (2023.01)
G06Q 30/06 (2023.01)
H04M 1/72445 (2021.01)
G06Q 20/32 (2012.01)
G06Q 30/0238 (2023.01)
G06Q 30/02 (2023.01)
G06Q 20/38 (2012.01)
G06Q 20/40 (2012.01)
G06Q 20/36 (2012.01)
G06Q 20/16 (2012.01)
G06Q 20/00 (2012.01)
G06Q 20/10 (2012.01)
G06Q 30/0251 (2023.01)
G06Q 30/0601 (2023.01)
H04W 8/20 (2009.01)
H04W 4/18 (2009.01)
H04B 5/00 (2006.01)
G06Q 40/12 (2023.01)
G06Q 40/10 (2023.01)
H04W 4/80 (2018.01)
H04W 4/029 (2018.01)
H04N 21/81 (2011.01)
G07F 7/10 (2006.01)
G06Q 40/00 (2023.01)
H04W 88/02 (2009.01)
H04W 4/02 (2018.01)

(52) U.S. Cl.

CPC **G06Q 20/202** (2013.01); **G06Q 20/204** (2013.01); **G06Q 20/206** (2013.01); **G06Q 20/32** (2013.01); **G06Q 20/322** (2013.01); **G06Q 20/325** (2013.01); **G06Q 20/326** (2020.05); **G06Q 20/3223** (2013.01); **G06Q 20/3226** (2013.01); **G06Q 20/3227** (2013.01); **G06Q 20/3255** (2013.01); **G06Q 20/3278** (2013.01); **G06Q 20/3674** (2013.01); **G06Q 20/382** (2013.01); **G06Q 20/3821** (2013.01); **G06Q 20/40** (2013.01); **G06Q 20/409** (2013.01); **G06Q 20/4012** (2013.01); **G06Q 20/4014** (2013.01); **G06Q 30/02** (2013.01); **G06Q 30/0222** (2013.01); **G06Q 30/0238** (2013.01); **G06Q 30/0251** (2013.01); **G06Q 30/0253** (2013.01); **G06Q 30/0255** (2013.01); **G06Q 30/0267** (2013.01); **G06Q 30/0268** (2013.01); **G06Q 30/06** (2013.01); **G06Q 30/0613** (2013.01); **G06Q 30/0635** (2013.01); **G06Q 40/10** (2013.01); **G06Q 40/12** (2013.12); **H04B 5/0025** (2013.01); **H04M 1/72445** (2021.01); **H04W 4/18** (2013.01); **H04W 4/21** (2018.02); **H04W 8/205** (2013.01); **G06Q 20/10** (2013.01); **G06Q 20/105** (2013.01); **G06Q 40/00** (2013.01); **G07F 7/1008** (2013.01); **H04N 21/812** (2013.01); **H04W 4/02** (2013.01); **H04W 4/029** (2018.02); **H04W 4/80** (2018.02); **H04W 88/02** (2013.01)

(58) Field of Classification Search

CPC **G06Q 40/10**; **G06Q 99/00**; **G06K 5/00**; **G06K 7/08**; **G06K 7/10237**; **G06K 15/00**; **H04W 12/12**; **H04W 4/24**
 USPC **455/41.1**, **406-10**, **556.1**, **558**; **235/375-385**, **451**, **462**, **492**; **705/16**, **18**, **705/30**, **40**, **41**, **44**, **64**
 See application file for complete search history.

(56)**References Cited**

U.S. PATENT DOCUMENTS

6,038,367 A 3/2000 Abecassis
 6,075,971 A * 6/2000 Williams H04N 7/165
 725/23
 6,101,483 A * 8/2000 Petrovich G06Q 20/343
 705/26.8
 6,115,601 A * 9/2000 Ferreira H04M 17/20
 455/406
 6,123,259 A * 9/2000 Ogasawara G06Q 30/0267
 705/14.1
 6,128,655 A 10/2000 Fields
 6,141,666 A 10/2000 Tobin
 6,199,082 B1 3/2001 Ferrel
 6,250,557 B1 * 6/2001 Forslund G06Q 20/229
 235/375
 6,394,341 B1 * 5/2002 Makipaa G06Q 20/322
 235/379
 6,415,156 B1 7/2002 Stadelmann
 6,450,407 B1 * 9/2002 Freeman G06K 19/0723
 235/487
 6,466,203 B2 10/2002 Van Ee
 6,587,835 B1 * 7/2003 Treyz G06Q 30/0633
 705/14.64
 6,605,120 B1 8/2003 Fields
 6,771,981 B1 8/2004 Zalewski
 6,772,396 B1 8/2004 Cronin
 6,886,017 B1 4/2005 Jackson
 6,950,939 B2 9/2005 Tobin
 7,031,945 B1 4/2006 Donner
 7,063,263 B2 6/2006 Swartz
 7,069,248 B2 6/2006 Huber
 7,096,003 B2 8/2006 Joao
 7,110,744 B2 9/2006 Freeny
 7,110,792 B2 * 9/2006 Rosenberg G06Q 20/085
 455/406
 7,127,236 B2 10/2006 Khan
 7,200,578 B2 * 4/2007 Paltenghe G06Q 20/3574
 705/26.1
 7,289,810 B2 10/2007 Jagadeesan
 7,308,254 B1 12/2007 Rissanen
 7,357,312 B2 4/2008 Gangi
 7,379,920 B2 5/2008 Leung
 7,383,226 B2 * 6/2008 Kight G06Q 20/10
 705/40
 7,472,829 B2 1/2009 Brown
 7,482,925 B2 1/2009 Hammad
 7,493,284 B2 2/2009 Celi et al.
 7,512,567 B2 * 3/2009 Bommel G06Q 20/204
 705/64
 7,522,905 B2 4/2009 Hammad
 7,589,628 B1 * 9/2009 Brady, Jr. H04L 67/306
 340/8.1
 7,739,596 B2 6/2010 Clarke-Martin
 7,783,532 B2 * 8/2010 Hsu G06Q 30/0236
 705/28
 7,784,684 B2 * 8/2010 Labrou G06Q 20/327
 705/64
 7,818,284 B1 * 10/2010 Walker G06Q 30/0605
 705/26.2
 7,827,056 B2 * 11/2010 Walker G06Q 20/387
 705/14.1
 7,870,077 B2 * 1/2011 Woo G06Q 30/06
 705/16

(56)

References Cited

U.S. PATENT DOCUMENTS

2008/0010190	A1 *	1/2008	Rackley, III	G06Q 20/3223	705/39	2008/0208762	A1 *	8/2008	Arthur	G06Q 20/20
2008/0010191	A1 *	1/2008	Rackley, III	G06Q 20/363	705/39	2008/0221997	A1 *	9/2008	Wolfe	G06Q 30/02
2008/0010192	A1 *	1/2008	Rackley, III	G06Q 20/10	705/39	2008/0242274	A1 *	10/2008	Swanburg	H04L 67/306
2008/0010193	A1 *	1/2008	Rackley, III	G06Q 20/325	705/39	2008/0249938	A1 *	10/2008	Drake-Stoker	H04W 12/106
2008/0010196	A1 *	1/2008	Rackley, III	G06Q 40/00	705/40	2008/0255947	A1 *	10/2008	Friedman	G06Q 20/327
2008/0010204	A1 *	1/2008	Rackley, III	G06Q 20/14	705/45	2008/0262928	A1 *	10/2008	Michaelis	G06Q 30/02
2008/0010215	A1 *	1/2008	Rackley, III	G06Q 20/326	705/70	2008/0274794	A1 *	11/2008	Mathieson	G06Q 30/02
2008/0011825	A1 *	1/2008	Giordano	G06Q 20/04	235/383	2008/0275779	A1 *	11/2008	Lakshminarayanan	G06Q 20/325
2008/0017704	A1 *	1/2008	VanDeburg	G07F 7/025	235/380	2008/0305774	A1	12/2008	Ramakrishna	705/39
2008/0027795	A1 *	1/2008	Medlin	G06Q 20/387	705/14.23	2009/0000618	A1	1/2009	Hameen-Anttila	705/41.1
2008/0294556	A1	1/2008	Anderson	G06Q 20/102	705/40	2009/0018913	A1 *	1/2009	Sarukkai	H04M 3/53383
2008/0040265	A1 *	2/2008	Rackley, III	G06Q 20/102	705/40	2009/0061884	A1 *	3/2009	Rajan	G06Q 30/0225
2008/0045172	A1 *	2/2008	Narayanaswami	G06Q 30/02	455/187.1	2009/0063312	A1 *	3/2009	Hurst	G06Q 20/40
2008/0046366	A1	2/2008	Bemmel	G06Q 20/425	235/380	2009/0075592	A1	3/2009	Nystrom et al.	705/41
2008/0048022	A1 *	2/2008	Vawter	G06Q 20/327	455/410	2009/0076906	A1 *	3/2009	Kansal	G06Q 30/0261
2008/0051059	A1 *	2/2008	Fisher	G06Q 20/327	455/410	2009/0076912	A1 *	3/2009	Rajan	G06Q 30/0267
2008/0051142	A1 *	2/2008	Calvet	H04W 88/02	455/558	2009/0098825	A1	4/2009	Huomo	705/14.64
2008/0052192	A1 *	2/2008	Fisher	G06Q 10/02	705/5	2009/0106112	A1 *	4/2009	Dalmia	G06Q 40/12
2008/0052233	A1 *	2/2008	Fisher	G06Q 20/327	705/40	2009/0112747	A1 *	4/2009	Mullen	G06Q 40/02
2008/0059329	A1 *	3/2008	Luchene	G06Q 30/0603	705/26.81	2009/0124234	A1 *	5/2009	Fisher	H04B 5/0031
2008/0097915	A1 *	4/2008	Golan	G06Q 30/02	705/14.69	2009/0132362	A1 *	5/2009	Fisher	G06Q 30/06
2008/0116264	A1	5/2008	Hammad et al.	G06Q 20/102	455/406	2009/0143104	A1 *	6/2009	Loh	G06Q 20/352
2008/0126145	A1 *	5/2008	Rackley, III	G06Q 20/102	455/406	2009/0144161	A1 *	6/2009	Fisher	G06Q 20/3821
2008/0133336	A1 *	6/2008	Altman	H04W 4/21	705/14.1	2009/0177587	A1 *	7/2009	Siegal	G06Q 20/10
2008/0139155	A1	6/2008	Boireau	G06Q 30/0207	705/14.1	2009/0194591	A1 *	8/2009	Gobburu	H04H 60/48
2008/0140520	A1 *	6/2008	Hyder	G06Q 30/0207	705/14.1	2009/0227281	A1 *	9/2009	Hammad	G06K 19/07309
2008/0148040	A1 *	6/2008	Machani	G06F 21/6245	713/193	2010/0057619	A1 *	3/2010	Weller	G06Q 20/04
2008/0167017	A1 *	7/2008	Wentker	G06Q 30/0224	455/406	2010/0063895	A1 *	3/2010	Dominguez	G06Q 20/40
2008/0167961	A1 *	7/2008	Wentker	G06Q 20/3278	705/14.25	2010/0145835	A1 *	6/2010	Davis	G06Q 20/1085
2008/0167988	A1 *	7/2008	Sun	G06Q 20/3278	455/406	2010/0312694	A1 *	12/2010	Homeier-Beals	G06Q 30/02
2008/0172274	A1 *	7/2008	Hurowitz	H04L 67/61	455/433	2011/0055038	A1 *	3/2011	Mengerink	G06Q 20/085
2008/0172285	A1 *	7/2008	Hurowitz	G06Q 30/02	725/23	2011/0320316	A1 *	12/2011	Randazza	G06Q 30/0617
2008/0172291	A1 *	7/2008	Hurowitz	G06Q 30/02	705/14.1	2012/0030044	A1 *	2/2012	Hurst	G06Q 20/326
2008/0172292	A1 *	7/2008	Hurowitz	G06Q 30/02	725/23	2012/0150744	A1 *	6/2012	Carlson	G06Q 20/12
2008/0177668	A1	7/2008	Delean	G06Q 30/02	705/44	2012/0215573	A1 *	8/2012	Sussman	H04L 43/0894
2008/0207234	A1 *	8/2008	Arthur	G07F 17/16	455/466	2012/0220314	A1 *	8/2012	Altman	H04L 67/306
2008/0208681	A1	8/2008	Hammad	G06Q 40/00	705/41	2012/0265677	A1 *	10/2012	Rackley, III	G06Q 20/325
2008/0208743	A1 *	8/2008	Arthur	G06Q 20/32	705/41	2013/0013501	A1 *	1/2013	Rackley, III	G06Q 20/32
2008/0208744	A1 *	8/2008	Arthur	G06Q 20/32	705/41						

(56)

References Cited

U.S. PATENT DOCUMENTS

2013/0054470	A1 *	2/2013	Campos	G06Q 20/36 705/67
2013/0212016	A1 *	8/2013	Davis	G06Q 40/12 705/42
2015/0012440	A1	1/2015	Kelley	

FOREIGN PATENT DOCUMENTS

WO	WO2006/114601	11/2006
WO	WO 2007/129081	11/2007

OTHER PUBLICATIONS

U.S. Appl. No. 15/822,131 Notice Of mailed Apr. 15, 2020, 10 p.
 U.S. Appl. No. 90/019,135, Nov. 23, 2022, Fisher, filed Mar. 21, 2016.
 U.S. Appl. No. 90/019,134, Nov. 23, 2022, Fisher, filed Apr. 15, 2014.
 U.S. Appl. No. 14/253,648 Board Decision mailed May 13, 2020, 11 p.
 U.S. Appl. No. 14/253,648 Notice Of Allowance dated Sep. 10, 2020, 11 p.
 "Text Messaging" https://en.m.wikipedia.org/wiki/Text_messaging.
 "Text Based User Interface" https://en.wikipedia.org/wiki/User_interface.

"WAP" https://en.wikipedia.org/wiki/Wireless_Application_Protocol.
 "Multimedia messaging" https://en.wikipedia.org/wiki/Multimedia_Messaging_Service#Technical_description.
 Web based user interface https://en.wikipedia.org/wiki/User_interface.
 Ajax <https://techterms.com/definition/ajax>.
 Java script <https://techterms.com/definition/javascript>.
 "Browser games" www.60freegames.com/Free-to-Play/Browser-Games.
 "Text-based games" https://en.wikipedia.org/wiki/Text-based_game.
 "Online shopping" https://en.wikipedia.org/wiki/Online_shopping.
 "Social networking services" https://en.wikipedia.org/wiki/Social_networking_service.
 "Web mapping" https://en.wikipedia.org/wiki/Web_mapping.
 "Mobile browser" https://en.wikipedia.org/wiki/Mobile_browser.
 "Voice browser" https://en.wikipedia.org/wiki/Voice_browser.
 "Email" <https://techterms.com/definition/email>.
 "Web mail" <https://en.wikipedia.org/wiki/Webmail>).
 "WAP Browser" https://en.m.wikipedia.org/wiki/Wireless_Application_Protocol.
 "Binary application" https://en.m.wikipedia.org/wiki/Application_binary_interface.
 IPR2021-01529.
 PTAB Decision Denying institution of IPR2021-01529.
 IPR2021-01530.
 PTAB Decision Denying institution of IPR2021-01530.

* cited by examiner

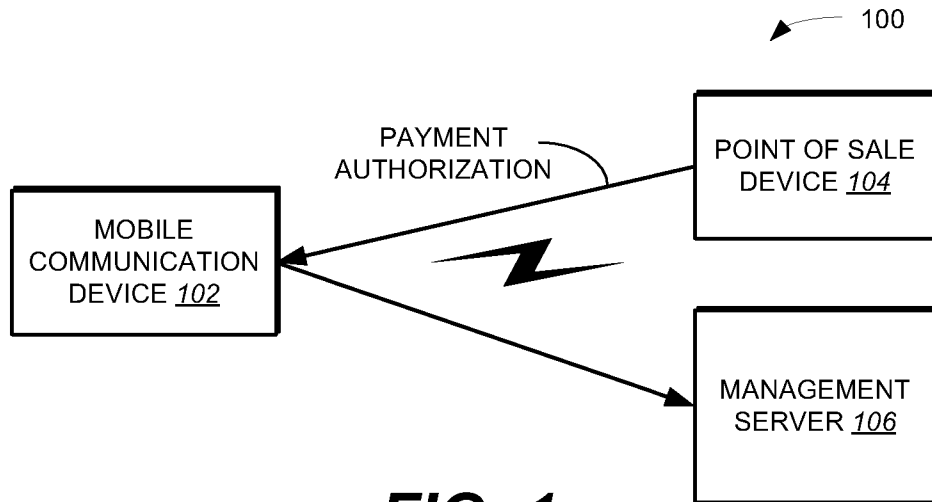


FIG. 1

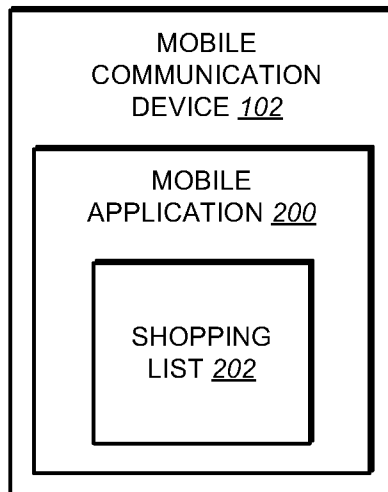


FIG. 2

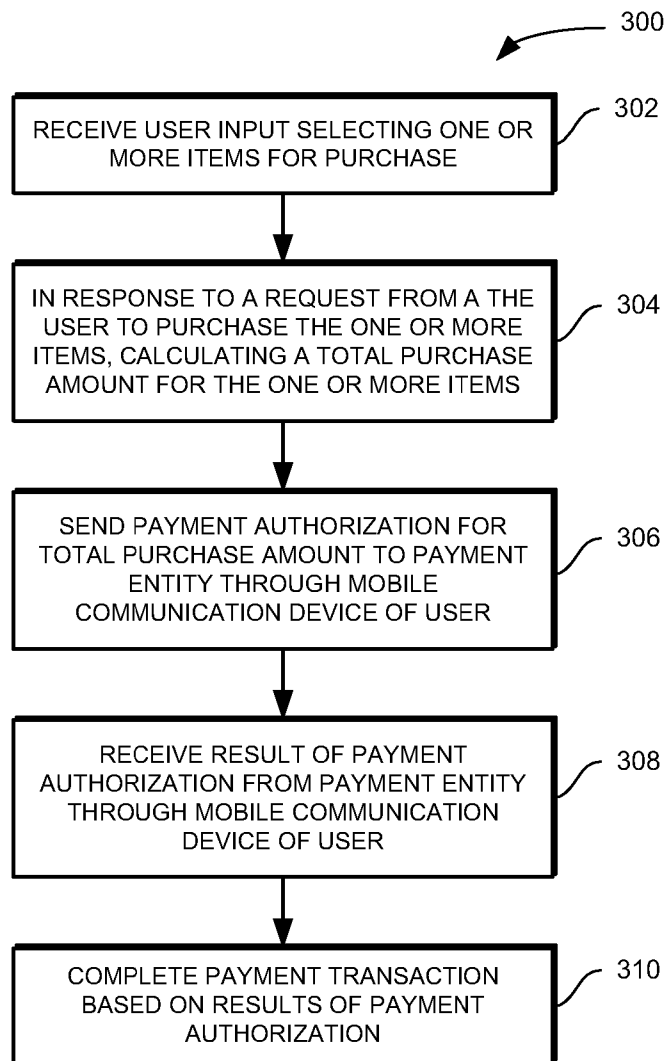


FIG. 3

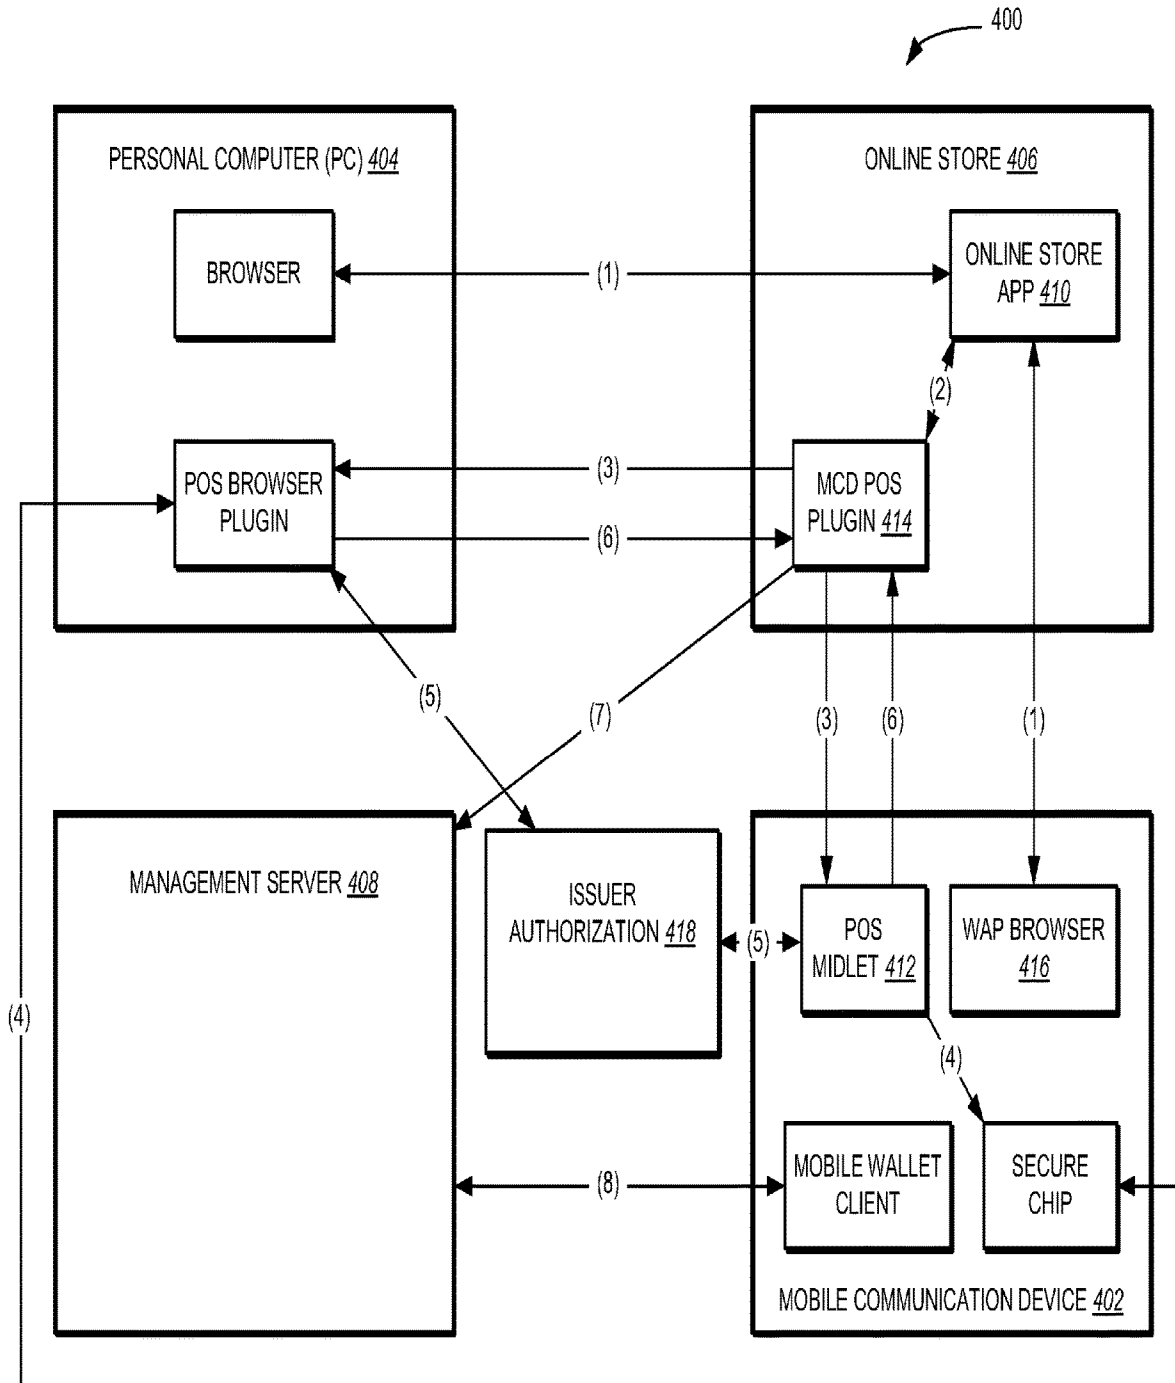


FIG. 4

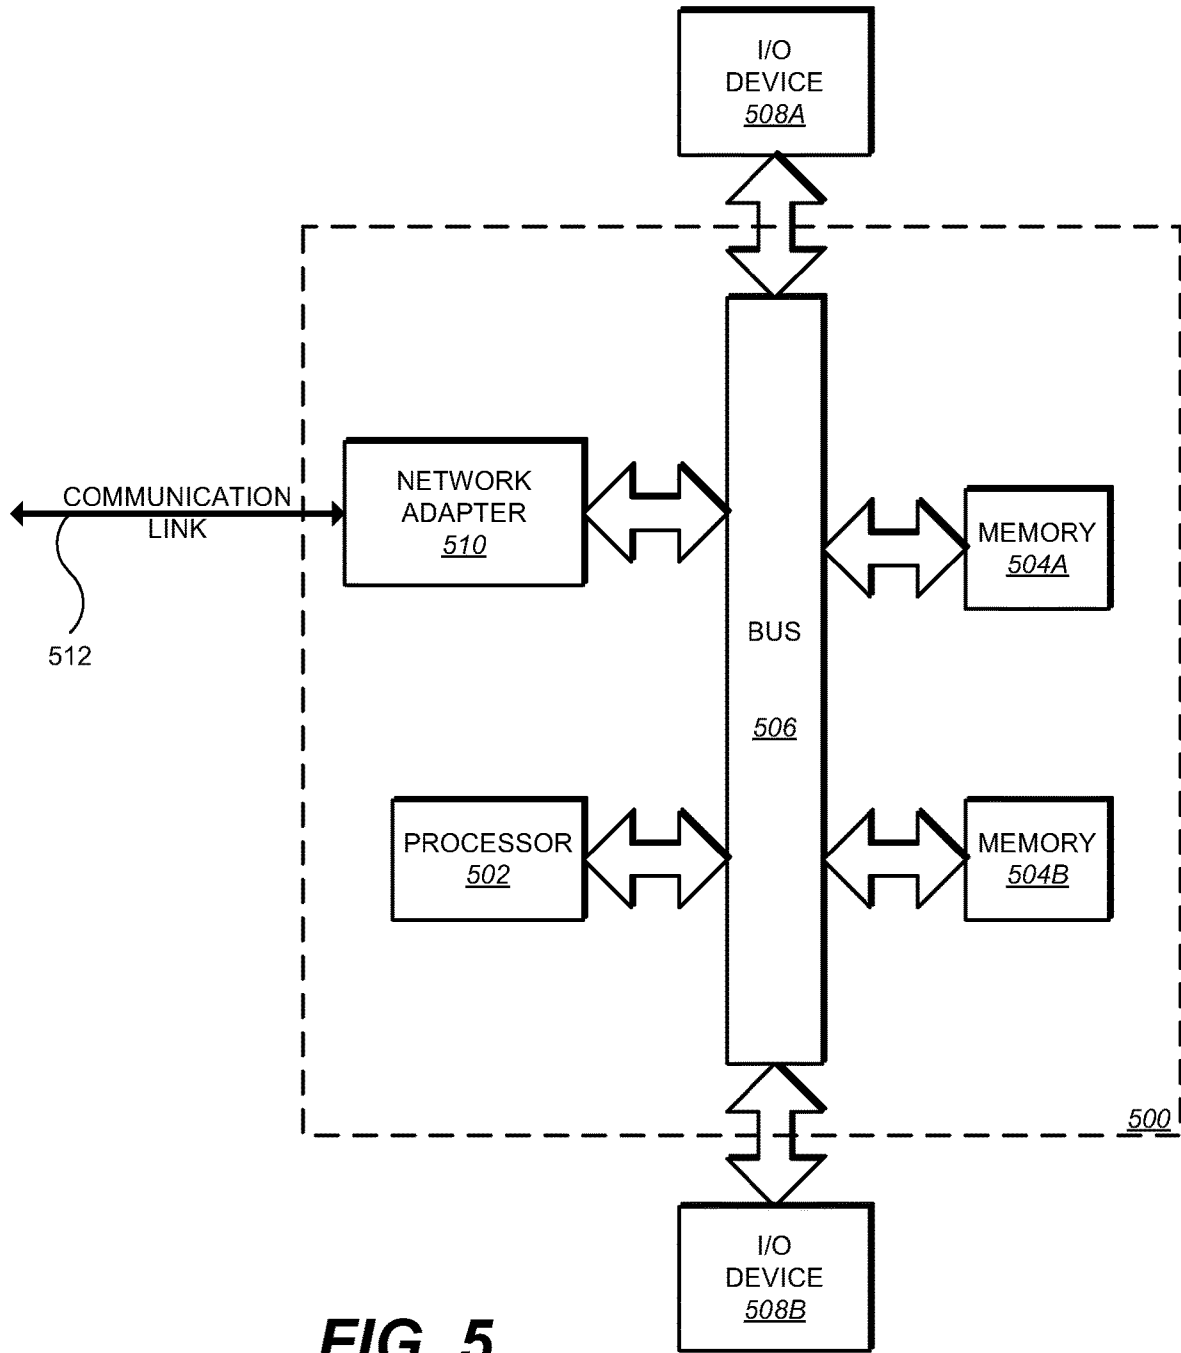


FIG. 5

METHOD AND SYSTEM FOR REMOTE TRANSACTION PROCESSING USING A NON-BROWSER BASED APPLICATION

CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation and claims priority to U.S. application Ser. No. 15/822,131 filed Nov. 25, 2017 titled REMOTE TRANSACTION PROCESSING WITH AUTHENTICATION FROM A NON-BROWSER BASED APPLICATION which claims priority to U.S. application Ser. No. 14/686,695 filed Apr. 14, 2015 titled INDUCTION BASED TRANSACTION AT A TRANSACTION SERVER now U.S. Pat. No. 9,836,731 issued on Dec. 5, 2017 which is a continuation and claims priority to U.S. application Ser. No. 13/710,646, filed Dec. 11, 2012 now U.S. Pat. No. 9,015,064 issued on Apr. 21, 2015 titled UTILIZING A SECURE ELEMENT FOR NFC TRANSACTIONS WHICH INCLUDES RESPONSE DATA DURING INDUCTION which is a continuation and claims priority to U.S. application Ser. No. 11/948,903, filed Nov. 30, 2007 now U.S. Pat. No. 8,352,323 issued on Jan. 8, 2013 titled CONDUCTING AN ONLINE PAYMENT TRANSACTION USING AN NFC MOBILE COMMUNICATION DEVICE, all of which is incorporated by reference herein in its entirety.

FIELD OF INVENTION

The present invention relates to data communications and wireless devices.

BACKGROUND OF THE INVENTION

Mobile communication devices—e.g., cellular phones, personal digital assistants, and the like—are increasingly being used to conduct payment transactions as described in U.S. patent application Ser. No. 11/933,351, entitled “Method and System For Scheduling A Banking Transaction Through A Mobile Communication Device”, and U.S. patent application Ser. No. 11/467,441, entitled “Method and Apparatus For Completing A Transaction Using A Wireless Mobile Communication Channel and Another Communication Channel”, both of which are incorporated herein by reference. Such payment transactions can include, for example, purchasing goods and/or services, bill payments, and transferring funds between bank accounts.

BRIEF SUMMARY OF THE INVENTION

In general, this specification describes a method and system for conducting an online payment transaction through a point of sale device. The method includes receiving input from a user selecting an item for purchase through the point of sale device; calculating a total purchase amount for the item in response to a request from the user to purchase the item; and sending payment authorization for the total purchase amount from the point of sale device to a payment entity, in which the payment authorization is sent to the payment entity via a mobile communication device of the user. The method further includes receiving a result of the payment authorization from the payment entity through the mobile communication device; and completing the payment transaction based on the result of the payment authorization.

Particular implementations can include one or more of the following features. The point of sale device can be a desktop computer, a laptop computer, or a terminal. The mobile communication device can be a cellular phone, a wireless personal digital assistant (PDA), or a laptop computer. The cellular phone can be an NFC-enabled phone. Sending payment authorization for the total purchase amount from the point of sale device to a payment entity can include sending the payment authorization securely to the payment entity. The payment entity can be a person, a computer system, or a bank. The method can further include maintaining a shopping list on the mobile communication device of the user, in which the shopping list includes a listing of one or more items to be purchased by the user. The payment authorization can be an authorization for payment with a credit card, a debit card, or a prepaid card.

The details of one or more implementations are set forth in the accompanying drawings and the description below. Other features and advantages will be apparent from the description and drawings, and from the claims.

BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a block diagram of a communication system including a wireless mobile communication device and a management server in accordance with one implementation.

FIG. 2 illustrates one implementation of the wireless mobile communication device of FIG. 1.

FIG. 3 is a method for conducting a payment transaction using a point of sale device in accordance with one implementation.

FIG. 4 illustrates a block diagram of a communication system including a wireless mobile communication device and an online store in accordance with one implementation.

FIG. 5 is a block diagram of a data processing system suitable for storing and/or executing program code in accordance with one implementation.

Like reference symbols in the various drawings indicate like elements.

DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 illustrates one implementation of a communication system **100**. The communication system **100** includes a hand-held, wireless mobile communication device **102** a point-of-sale device **104** and a management server **106**. In one implementation, the mobile communication device **102** includes a mobile application (discussed in greater detail below) that permits a user of the mobile communication device **102** to conduct payment transactions. Payment transactions can include, for example, using contactless payment technology at a retail merchant point of sale (e.g., through point of sale device **104**), using mobile/internet commerce (e.g., purchase tickets and products, etc.), storage of payment information and other digital artifacts (e.g., receipts, tickets, coupons, etc.), storage of banking information (payment account numbers, security codes, PIN's, etc.), and accessing banking service (account balance, payment history, bill pay, fund transfer, etc.), and so on. The mobile communication device **102** can be a cellular phone, a wireless personal digital assistant (PDA), a laptop computer, or other wireless communication device. The point of sale device **104** can be a desktop computer, laptop computer, terminal, or other device that is configured to receive user input selecting items for purchase or other transaction.

In one implementation, authorizations for payment transactions that are made through the point of sale device **104** are sent from the point of sale device **104** to an issuer authorization (e.g., management server **106**) through the mobile communication device **102** (as shown in FIG. 1). In one implementation, an issuer authorization is a payment entity that either approves or disapproves a payment transaction. An issuer authorization can be, e.g., a person, computer system, bank (or other third party). One potential benefit of having payment authorizations flow through the mobile communication device **102** is that sensitive user information (e.g. account numbers, pin numbers, and/or identity information) need only be sent from the mobile communication device **102** directly to an issuer authorization. Such operation reduces the potential for identity theft and/or fraudulent purchases made through a point of sale device. For example, (in one implementation) payment authorizations cannot be sent to an issuer authorization if the mobile communication device **102** is turned off.

FIG. 2 illustrates one implementation of the mobile communication device **102**. The mobile communication device **102** includes a mobile application **200** that (in one implementation) is provided to the mobile communication device **102** through a remote server (e.g., management server **106**). In one implementation, the mobile application is a Mobile Wallet application available from Mobile Candy Dish, Inc., of Alameda, CA. In one implementation, the mobile application is a hosted service, as described in U.S. patent application Ser. No. 11/939,821, entitled "Method and System For Securing Transactions Made Through a Mobile Communication Device", which is incorporated herein by reference. In one implementation, the mobile application **200** is configured to send requests to the management server for artifacts based on user input, e.g., received through a keypad (not shown) of the mobile communication device **102**. Requests to the management server **106** can also be automated, via proximity-based services, e.g., consumer tapping (or in close proximity) an LBS/contactless/Rfid enabled phone against a smart poster (RFID/Bluetooth/LBS enabled, etc.), kiosk, or other device.

In one implementation, the mobile application **200** running on the mobile communication device **102** is configured to receive artifacts (e.g., advertisements, receipts, tickets, coupons, media, content, and so on) from the management server **106**. In one implementation, the management server **106** sends artifacts to the mobile application based on user profile information and/or a transaction history (or payment trends) associated with a user of the mobile communication device **102** as described in U.S. patent application Ser. No. 11/944,267, entitled "Method and System For Delivering Information To a Mobile Communication Device Based On Consumer Transactions", which is incorporated herein by reference.

In one implementation, the mobile communication device **102** is an NFC-enabled phone. The mobile communication device **102** can be NFC-enabled, for example, through an embedded chip or a sticker that is affixed to the cellular phone, as described in U.S. application Ser. No. 11/933,321, entitled "Method and System For Adapting a Wireless Mobile Communication Device For Wireless Transactions", which is incorporated herein by reference. In one implementation, the NFC chip (or sticker) on the cellular phone can be used in conjunction with a merchant's point of sale device as described in greater detail below.

For example, with reference to FIG. 4, in one implementation, the NFC chip (or sticker) on the cellular phone can communicate with NFC chips that are installed on the front

of PC's (TV's, Kiosks, or any other device) and serve as scanners/readers. In this implementation a mobile candy dish applet (e.g., MCD POS plugin **414**) is installed on the consumer's computer (e.g., PC **404**) which interfaces with the NFC chip on the PC. When a consumer (or user) is shopping online and they are ready to pay for their products, the consumer opens his mobile wallet and selects one of the payment methods (e.g., credit card, debit card, prepaid card, etc.) from their mobile wallet. If a default card has been selected already, this step is not necessary. The consumer then waves their phone over the NFC reader present on the PC **404**. The consumer's payment credentials are transferred from the phone to the merchant website (e.g., online store application **410**) using a communication protocol between the chip in the phone and the chip in the PC, which can be radio frequency for example. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use (against a larger purchase for example), or have the coupon automatically applied during the transaction and the transaction amount is updated. After the consumer enters any necessary validation information (e.g., pin) to provide a multi-factor authentication and confirms the transaction, the online purchase is processed as normal by the merchant's online processor. The mobile wallet can retrieve transaction data, account balance from the management server **408**.

In one implementation, the mobile communication device **102** is a non NFC-enabled phone. In this implementation, the consumer connects his phone to the PC **404** via some non radio frequency method (e.g., IR, Bluetooth, USB cable, etc.). When a consumer is shopping online and they are ready to pay for their products, the consumer opens his mobile wallet and selects one of the payment methods (e.g., credit card, debit card, prepaid card, etc.) from their mobile wallet. If a default card has been selected already, this step is not necessary. The consumer then pushes, e.g., a "Buy now" button and the consumer's payment credentials are transferred from the phone to the merchant website (e.g., online store application **410**) using the protocol between the phone and the PC **404** which can be radio frequency, for example. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use, or have the coupon automatically applied during the transaction and the transaction amount is updated. After the consumer enters any necessary validation information (e.g., pin) to provide multi-factor authentication and confirms the transaction, the online purchase is processed as normal by the merchant's online processor. The mobile wallet can retrieve transaction data and account balance from the management server **408**.

In one implementation, the management server **408** and merchant portal (e.g., online store **408**) are maintained by trusted parties and use an encrypted tunnel to transfer financial data. When the consumer is ready to pay for their online product, they enter their cell phone number on the merchant portal. The merchant portal (which has an MCD applet (e.g., MCD POS plugin **414**) installed on its server) securely connects to the management server **408** (that in one implementation is maintained by Mobile Candy Dish (MCD)). In one implementation, the management server **408** identifies the consumer through their cell phone number, and verifies the consumer's authenticity by sending a unique transaction code to the consumer mobile wallet on their cell phone. The consumer then enters this unique transaction code onto the merchant's web portal. The merchant portal sends this transaction number to the management server **408** for authentication. Upon authentication, the consumer's

5

virtual wallet and payment methods (e.g., credit card, debit card, prepaid card, etc.) are securely retrieved from the management server **408** and are displayed to the consumer in a window on a website associated with the merchant portal. The consumer selects one of these payment methods to pay for their transaction. If a default card has been selected already, this step is not necessary. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use, or have the coupon automatically applied during the transaction and the transaction amount is updated. After the consumer enters any necessary validation information to provide a multi-factor authentication and confirms the transaction, the online purchase is processed as normal by the merchant's online processor. The mobile wallet can retrieve transaction data, account balance from the management server **408**.

Referring to FIG. 2, in one implementation, the mobile application **200** maintains a shopping list **202** for a consumer. Accordingly, consumers have the ability to store their shopping list in their mobile wallet and add, delete, or change items on their shopping list either in offline or online mode. In one implementation, consumers are sent coupons based on items on their shopping list, preferences, previous shopping history, proximity to the physical retail store, or a combination of these parameters, as discussed in application Ser. No. 11/944,267, which is incorporated by reference above. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use, or have the coupon automatically applied during the transaction and the transaction amount is updated. When a consumer wants to order the items on their shopping list via an online merchant (in contrast to a physical retail store), the consumer can logon to the merchant portal and electronically transmit their shopping list to the merchant portal either by waving their phone over NFC enabled PC's or some other connection such as IR, bluetooth, USB, or the like.

FIG. 3 illustrates a method **300** for conducting a payment transaction using a point of sale device (e.g., point of sale device **104**). User input is received selecting one or more items for purchase (e.g., at the point of sale device) (step **302**). In general, the transaction being made at the point of sale device can be any type of transaction that involves the exchange or transfer of funds—e.g., the transaction can be a payment transaction, a fund transfer, or other type of transaction. In response to a request from the user to purchase the one or more items, a total purchase amount for the one or more items is calculated (e.g., by the point of sale device) (step **304**). If the user has coupons in their mobile wallet the user can either manually apply the coupon or have the coupon automatically applied during the transaction and the transaction amount is updated. The user request to purchase an item can be received, e.g., by a user clicking on a “buy now” icon that is displayed on a graphical user interface of the point of sale device. Payment authorization for the total purchase amount is sent to a payment entity through a mobile communication device of the user (step **306**). A result of the payment authorization is received at the point of sale device from the payment entity via the mobile communication device (step **308**). The payment transaction is completed based on the result of the payment authorization (step **310**). If the payment transaction was authorized by the payment entity, then the sale of the items through the point of sale device is completed. Otherwise, if the payment transaction was not authorized by the payment entity, then the point of sale device terminates the payment transaction.

6

FIG. 4 illustrates an example payment transaction being made in a communication system **400** in accordance with one implementation. The communication system **400** includes a mobile communication device **402**, a personal computer (PC) **404**, an online store **406**, and a core (or datastore) **408**. As indicated by interaction (1), a user (or customer), using a phone (e.g., mobile communication device **402** or personal computer **404**), browses an online store website (online store application **410**) and finds an item that the customer wishes to purchase. This could also be a purchase made through a midlet application (POS midlet **412**) residing on the mobile communication device **402**. The user then goes to, e.g., a checkout of the online store **406** make a purchase. If the user has coupons in their mobile wallet the user can either manually apply the coupon or have the coupon automatically applied during the transaction and the transaction amount is updated. When it comes time to authorize the purchase, (in one implementation) the user is given an option to purchase with the mobile communication device **402**. In one implementation, the mobile communication device **402** is an NFC-equipped phone (or NFC phone).

In interaction (2), when the user chooses to purchase with the mobile communication device **402**, the online store application **410** sends the transaction information for authorization to the POS vendor plugin (e.g., MCD POS plugin **414**). In one implementation, the POS vendor plugin is installed in the merchant's online store and enables the merchant to accept MCD Blaze payments as an alternative form of payment, similar to accepting credit cards for payment. As shown by interaction (3), the POS vendor plugin formats, encrypts, and cryptographically signs the purchase authorization request which is sent via a secure SSL link (e.g., HTTPS, Bluetooth, IR, USB, or other suitable protocol) established by the browser/web application **416** back to the mobile communication device **402**. As with the first scenario, all communications is over secure channels. (It may be required that the mobile wallet application be opened prior to beginning a phone online purchase.) The POS midlet **412** is a component of the mobile wallet application that executes PayPass or other payment authorization protocol between itself and the SE payment applications on the mobile communication device **402** (interaction (4)). The results of the request are sent back to the POS vendor plugin.

As shown by interaction (5), the POS midlet **412** then forwards the properly formatted authorization request to a payment entity (e.g., issuer authorization **418**) for authorization. The results of the request are then sent back to the POS component of the mobile wallet. Through interaction (6), the POS midlet **412** then forwards the results back to the MCD POS plugin **414** to complete the purchase. The MCD POS plugin **414** then forwards the purchase transaction information to the management server **408** for later customer viewing (interaction (7)). As indicated by interaction (8), users (or customers) will then be able to query the management server **408** and immediately obtain purchase information, either by phone or PC.

One or more of method steps described above can be performed by one or more programmable processors executing a computer program to perform functions by operating on input data and generating output. Generally, the invention can take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment containing both hardware and software elements. In one implementation, the invention is implemented in software, which includes but is not limited to firmware, resident software,

microcode, etc. Furthermore, the invention can take the form of a computer program product accessible from a computer-usable or computer-readable medium providing program code for use by or in connection with a computer or any instruction execution system. For the purposes of this description, a computer-usable or computer readable medium can be any apparatus that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device. The medium can be an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system (or apparatus or device) or a propagation medium. Examples of a computer-readable medium include a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a rigid magnetic disk and an optical disk. Current examples of optical disks include compact disk—read only memory (CD-ROM), compact disk—read/write (CD-R/W) and DVD.

FIG. 5 illustrates a data processing system 500 suitable for storing and/or executing program code. Data processing system 500 includes a processor 502 coupled to memory elements 504A-B through a system bus 506. In other implementations, data processing system 500 may include more than one processor and each processor may be coupled directly or indirectly to one or more memory elements through a system bus. Memory elements 504A-B can include local memory employed during actual execution of the program code, bulk storage, and cache memories that provide temporary storage of at least some program code in order to reduce the number of times the code must be retrieved from bulk storage during execution. As shown, input/output or I/O devices 508A-B (including, but not limited to, keyboards, displays, pointing devices, etc.) are coupled to data processing system 500. I/O devices 508A-B may be coupled to data processing system 500 directly or indirectly through intervening I/O controllers (not shown).

In one implementation, a network adapter 510 is coupled to data processing system 500 to enable data processing system 500 to become coupled to other data processing systems or remote printers or storage devices through communication link 512. Communication link 512 can be a private or public network. Modems, cable modems, and Ethernet cards are just a few of the currently available types of network adapters.

Although the present invention has been particularly described with reference to implementations discussed above, various changes, modifications and substitutes are can be made. Accordingly, it will be appreciated that in numerous instances some features of the invention can be employed without a corresponding use of other features. Further, variations can be made in the number and arrangement of components illustrated in the figures discussed above.

What is claimed is:

1. A method for processing a remote transaction received from a non-browser based application comprising:

receiving, at the non-browser based application, information related to a userID information related to a password, wherein the non-browser based application is a mobile operating system platform based mobile application with a graphical user interface that is preinstalled or downloaded and installed on a mobile device, wherein the graphical user interface includes a graphical icon, the mobile device including a mobile device display, a mobile device processor, a mobile device memory, a mobile device radio transceiver that sup-

ports voice and data interactions through a first communication channel, and a mobile device wireless fidelity (Wi-Fi) transceiver;

transmitting, from the non-browser based application, the information related to the userID and the information related to the password to a remote management server;

receiving, at the mobile device, information authenticating the user associated with the information related to the userID and the information related to the password from the remote management server;

after user authentication, receiving a list of products from the remote management server at the non-browser based application for display using the non-browser based application;

receiving, at the non-browser based application an identification of one or more products selected from the list of products, wherein the non-browser based application receives the identification of one or more products selected from the list of products through the user input via the mobile device display of the mobile device;

transmitting from the non-browser based application to the remote management server the identification of one or more products selected from the list of products;

receiving, from the non-browser based application, a transaction purchase request, wherein the non-browser based application receives the transaction purchase request through the user input via the mobile device display of the mobile device;

transmitting, from the non-browser based application, the transaction purchase request to the remote management server;

after the remote transaction has been processed by a transaction server using a payment method, receiving at the non-browser based application, a digital artifact from the remote management server; and

displaying the digital artifact within the non-browser based application.

2. The method of claim 1, wherein the payment method is a credit card, debit card, or prepaid card.

3. The method of claim 1, wherein the digital artifact comprises an advertisement, receipt, ticket, coupon, media, metadata, and/or content.

4. The method of claim 1, further wherein data stored on the mobile device is encrypted using a mobile operating system native to the mobile device.

5. The method of claim 1, wherein the information related to the password is information related to a personal identification number (PIN).

6. The method of claim 1, wherein the information related to the password, is information related to biometric data.

7. The method of claim 1, wherein no sensitive information is stored on the mobile device.

8. The method of claim 7, wherein the sensitive information comprises at least one of information related to the payment method.

9. The method of claim 1, further wherein the non-browser based application generates an alert if it has not received the digital artifact from the remote management server within a certain period of time.

10. The method of claim 1, further wherein the non-browser based application displays the digital artifact while the mobile device maintains a connection to a wireless network; and

further comprises:

losing the connection of the mobile device to the wireless network while the non-browser based application displays the digital artifact; and

in an offline mode, after losing the connection, continuing to display the digital artifact within the non-browser based application.

11. The method of claim 1, further wherein upon the condition that the mobile device loses connection with a wireless network the non-browser based application monitors for access to the wireless network and automatically re-connects to the wireless network when the wireless network is available.

12. The method of claim 1, further wherein the non-browser based application sends a request to the remote management server for retransmission of the digital artifact if it has not received the digital artifact from the remote management server within a certain period of time.

13. The method of claim 1, further wherein the non-browser based application automatically displays the digital artifact in an easily retrievable format.

14. The method of claim 1, further wherein the non-browser based application is configured to use a structured format, wherein the structured format means the non-browser based application can store and display the digital artifact in an organized manner.

15. A mobile device for processing a remote transaction received from a non-browser based application comprising

a mobile device input interface configured to:

receive, at the non-browser based application information related to a userID and information related to a password, wherein the non-browser based application is a mobile operating system platform based mobile application with a graphical user interface that is preinstalled or downloaded and installed on the mobile device, wherein the graphical user interface includes a graphical icon, the mobile device including a mobile device display, a mobile device processor, a mobile device memory, a mobile device radio transceiver that supports voice and data interactions through a first communication channel, and a mobile device wireless fidelity (Wi-Fi) transceiver; receive information authenticating the user associated with the information related to the userID and the information related to the password from the remote management server;

after user authentication, receive a list of products from the remote management server at the non-browser based application for display using the non-browser based application;

receive, at the non-browser based application an identification of one or more products selected from the list of products, wherein the non-browser based application receives the identification of one or more products selected from the list of products through the user input via the mobile device display of the mobile device;

receive, at the non-browser based application, a transaction purchase request, wherein the non-browser based application receives the transaction purchase request through the user input via the mobile device display of the mobile device;

after the remote transaction has been processed by a transaction server using a payment method, receiving at the non-browser based application, a digital artifact from the remote management server;

a mobile device output interface configured to:

transmit, from the non-browser based application the information related to the userID and information related to the password to the remote management server;

transmit from the non-browser based application to the remote management server the identification of one or more products selected from the list of products; transmit, from the non-browser based application, the transaction purchase request to the remote management server;

a mobile device display configured to display the digital artifact within the non-browser based application.

16. The mobile device of claim 15, wherein the payment method is a credit card, debit card, or prepaid card.

17. The mobile device of claim 15, wherein the digital artifact comprises an advertisement, receipt, ticket, coupon, media, metadata, and/or content.

18. The mobile device of claim 15, further wherein data stored on the mobile device is encrypted using a mobile operating system native to the mobile device.

19. The mobile device of claim 15, wherein the information related to the password is information related to a personal identification number (PIN).

20. The mobile device of claim 15, wherein the information related to the password, is information related to biometric data.

21. The mobile device of claim 15, wherein no sensitive information is stored on the mobile device.

22. The mobile device of claim 21, wherein the sensitive information comprises at least one of information related to the payment method.

23. The mobile device of claim 15, further wherein the non-browser based application generates an alert if it has not received the digital artifact from the remote management server within a certain period of time.

24. The mobile device of claim 15, further wherein the non-browser based application displays the digital artifact while the mobile device maintains a connection to a wireless network; and

further comprises:

losing the connection of the mobile device to the wireless network while the non-browser based application displays the digital artifact; and

in an offline mode, after losing the connection, continuing to display the digital artifact within the non-browser based application.

25. The mobile device of claim 15, further wherein upon the condition that the mobile device loses connection with a wireless network the non-browser based application monitors for access to the wireless network and automatically re-connects to the wireless network when the wireless network is available.

26. The mobile device of claim 15, further wherein the non-browser based application sends a request to the remote management server for retransmission of the digital artifact if it has not received the digital artifact from the remote management server within a certain period of time.

27. The mobile device of claim 15, further wherein the non-browser based application automatically displays the digital artifact in an easily retrievable format.

28. The mobile device of claim 15, further wherein the non-browser based application is configured to use a structured format, wherein the structured format means the non-browser based application can store and display the digital artifact in an organized manner.

29. The method of claim 1, further wherein the remote management server is configured to store the user ID for a

11

plurality of the user's mobile devices and further wherein the configuration means that the remote management server scales.

30. The method of claim 1, further wherein the digital artifact is stored in the mobile device memory due to reasons of performance, usability, user experience, and user convenience.

31. The method of claim 1, further wherein maintaining the payment method at the remote management server results in a more secure system.

32. The method of claim 1, further wherein the transaction does not use a Point-Of-Sale terminal.

33. The method of claim 1, further wherein the non-browser based application is stored in a local mobile device memory during execution of the non-browser based application, a bulk storage mobile device memory when the non-browser based application is not being executed, and a cache mobile device memory to provide temporary storage of at least some of the non-browser based application in order to reduce the number of times the non-browser based application must be retrieved from the bulk storage mobile device memory during the execution.

34. The method of claim 1, wherein the non-browser based application is not Short Messaging Service (SMS).

35. The mobile device of claim 15, further wherein the remote management server is configured to store the user ID

12

for a plurality of the user's mobile devices and further wherein the configuration means that the remote management server scales.

36. The mobile device of claim 15, further wherein the digital artifact is stored in the mobile device memory due to reasons of performance, usability, user experience, and user convenience.

37. The mobile device of claim 15, further wherein maintaining the payment method at the remote management server results in a more secure system.

38. The mobile device of claim 15, further wherein the transaction does not use a Point-Of-Sale terminal.

39. The mobile device of claim 15, further wherein the non-browser based application is stored in a local mobile device memory during execution of the non-browser based application, a bulk storage mobile device memory when the non-browser based application is not being executed, and a cache mobile device memory to provide temporary storage of at least some of the non-browser based application in order to reduce the number of times the non-browser based application must be retrieved from the bulk storage mobile device memory during the execution.

40. The mobile device of claim 15, wherein the non-browser based application is not Short Messaging Service (SMS).

* * * * *