

# (12) United States Patent

### **Fisher**

### US 8,805,726 B2 (10) Patent No.: (45) **Date of Patent:** Aug. 12, 2014

### (54) ONLINE SHOPPING USING NFC AND A MOBILE DEVICE

(71) Applicant: Blaze Mobile, Inc., Berkeley, CA (US) (72) Inventor: Michelle Fisher, Oakland, CA (US) (73) Assignee: Michelle Fisher, Oakland, CA (US) (\*) Notice: Subject to any disclaimer, the term of this

patent is extended or adjusted under 35

U.S.C. 154(b) by 0 days.

Appl. No.: 13/710,441 (21)(22) Filed: Dec. 10, 2012

### (65)**Prior Publication Data**

US 2013/0103478 A1 Apr. 25, 2013

## Related U.S. Application Data

Continuation of application No. 11/948,903, filed on Nov. 30, 2007, now Pat. No. 8,352,323. **Int. Cl.** 

(51)G06Q 20/00 (2012.01) $H04\tilde{B} \ 1/38$ (2006.01)G06O 20/40 (2012.01)G06Q 20/32 (2012.01)G06O 20/10 (2012.01)G06Q 30/06 (2012.01)G06Q 30/02 (2012.01)G06Q 20/20 (2012.01) $G06\widetilde{Q}$  20/16 (2012.01)G06O 20/38 (2012.01)G06Q 20/36 (2012.01)H04N 21/81 (2011.01)H04W 4/00 (2009.01)G06Q 40/00 (2012.01)

(52) U.S. Cl.

G07F 7/10

(2013.01); **G06Q 20/32** (2013.01); **G06Q 20/108** (2013.01); **G06Q 30/06** (2013.01); H04N 21/812 (2013.01); H04W 4/008 (2013.01); *G06Q 20/4012* (2013.01); *G06Q 20/40* (2013.01); *G06Q 30/02* (2013.01); *G06Q* 20/4014 (2013.01); G06Q 20/322 (2013.01); G06Q 30/0238 (2013.01); G06Q 20/16 (2013.01); G06Q 20/20 (2013.01); G06Q 20/3227 (2013.01); G06Q 40/00 (2013.01); G07F 7/1008 (2013.01); G06Q 20/202 (2013.01); G06Q 20/3821 (2013.01); G06Q

(2006.01)

<b>20/206</b> (2013.01); <b>G06Q 20/00</b> (2013.01);
G06Q 30/0222 (2013.01); G06Q 40/10
(2013.01); G06Q 20/3278 (2013.01); G06Q
<b>20/3226</b> (2013.01); <b>G06Q 20/3674</b> (2013.01)
USPC
705/40; 705/41; 455/410; 455/411; 455/414.1;
455/558; 455/566

### Field of Classification Search

CPC ..... G06Q 20/102; G06Q 20/10; G06Q 40/10; G06Q 40/00; H04W 12/12; H04W 12/06 USPC .............. 455/558, 410, 411, 550, 566, 414.1; 340/10.1; 705/40, 41, 72, 30, 35, 39 See application file for complete search history.

### (56)References Cited

### U.S. PATENT DOCUMENTS

6,038,367 A 3/2000 Abecassis 6,101,483 A \* 8/2000 Petrovich et al. ..... 705/21 (Continued)

### FOREIGN PATENT DOCUMENTS

WO	WO 2006095212 A1	9/2006					
WO	WO 2006095212 A1	* 9/2006		H04M 11/00			
OTHER PUBLICATIONS							

U.S. Appl. No. 11/933,337, Office Action mailed May 27, 2010, 9 p.


(Continued)

Primary Examiner — Olusegun Goyea

### ABSTRACT

A method and system for conducting an online payment transaction through a point of sale device. The method includes receiving input from a user selecting an item for purchase through the point of sale device; calculating a total purchase amount for the item in response to a request from the user to purchase the item; and sending payment authorization for the total purchase amount from the point of sale device to a payment entity, in which the payment authorization is sent to the payment entity via a mobile communication device of the user. The method further includes receiving a result of the payment authorization from the payment entity through the mobile communication device; and completing the payment transaction based on the result of the payment authorization.

### 16 Claims, 4 Drawing Sheets

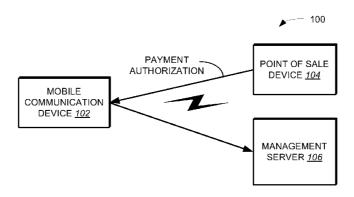

# US 8,805,726 B2 Page 2

(56) Refere	ences Cited	2004/0034544 A1	2/2004	
II C DATEN	T DOCUMENTS	2004/0064407 A1* 2004/0064408 A1*	4/2004	Kight et al
U.S. FAIEN	1 DOCUMENTS	2004/0064409 A1*		Kight et al 705/40
6,115,601 A * 9/2006	) Ferreira 455/406	2004/0064410 A1*		Kight et al 705/40
	O Ogasawara	2004/0073497 A1*		Hayes et al 705/27
	) Fields	2004/0078329 A1*		Kight et al 705/40
	) Tobin	2004/0083167 A1*	4/2004	U
	l Ferrel	2004/0093271 A1*	5/2004	Walker et al
	Forslund et al 235/492	2004/0111320 A1*	6/2004 7/2004	Schlieffers et al
	2 Stadelmann	2004/0127256 A1* 2004/0235450 A1*	11/2004	Goldthwaite et al 455/558 Rosenberg 455/406
	2 Freeman et al	2004/0243519 A1	12/2004	
	3 Fields	2004/0254836 A1*	12/2004	Emoke Barabas et al 705/14
	4 Zalewski	2004/0267618 A1	12/2004	Judicibus
	4 Cronin	2004/0267665 A1	12/2004	
6,886,017 B1 4/200	5 Jackson	2005/0003810 A1	1/2005	Chu
	5 Tobin	2005/0040230 A1*	2/2005 2/2005	Swartz et al
	5 Donner	2005/0043994 A1* 2005/0076210 A1	4/2005	Thomas
	5 Huber	2005/00/0210 A1 2005/0165646 A1*	7/2005	Tedesco et al 705/14
	5 Joao 5 Freeny	2005/0187873 A1*		Labrou et al 705/40
	6 Rosenberg 455/558	2005/0215231 A1	9/2005	Bauchot
	6 Khan	2006/0031752 A1*	2/2006	
	7 Paltenghe et al 705/74	2006/0089874 A1*		Newman et al 705/14
	7 Jagadeesan	2006/0143091 A1*		Yuan et al
	7 Rissanen	2006/0165060 A1*		Dua
	3 Gangi	2006/0191995 A1* 2006/0206709 A1*	8/2006	Stewart et al
	B Leung	2006/0218092 A1*	9/2006	
	8 Kight et al 705/40 9 Brown	2006/0219780 A1*		Swartz et al
.,,	Hammad	2006/0287920 A1*		Perkins et al 705/14
.,,	9 Bemmel et al 705/67	2006/0294025 A1*		Mengerink 705/77
	Hammad	2007/0004391 A1		Maffeis
	Hsu et al 705/28	2007/0011099 A1*		Sheehan 705/65
	) Labrou et al 235/380	2007/0021969 A1*		Homeier-Beals 705/1
	Walker et al 705/26.2	2007/0022058 A1* 2007/0095892 A1	5/2007	Labrou et al 705/67
	Walker et al 705/14.23	2007/0093892 A1 2007/0125838 A1*		Law et al
	Woo et al	2007/0125840 A1*		Law et al
	Shigeta et al	2007/0138299 A1*		Mitra
	Sweatman et al 455/466	2007/0156436 A1*	7/2007	Fisher et al 705/1
8,073,424 B2 * 12/201		2007/0179883 A1*	8/2007	
8,086,534 B2 * 12/201	l Powell 705/44	2007/0210155 A1*	9/2007	Swartz et al 235/383
	2 Jain 235/492	2007/0235519 A1	10/2007	
	2 Rackley	2007/0255662 A1 2007/0270166 A1*	11/2007	Tumminaro Hampel et al 455/456.3
	2 Zatloukal et al	2007/0270100 A1 2007/0293155 A1*		Liao et al
	2 Barnes et al	2008/0004952 A1*		Koli 705/14
	3 Walker et al	2008/0006685 A1*		Rackley, III et al 235/379
	3 Walker et al 705/26.7	2008/0010190 A1*	1/2008	Rackley, III et al 705/39
8,438,078 B2 * 5/2013	3 Walker et al 705/26.7	2008/0010191 A1*		Rackley, III et al 705/39
2001/0011250 A1* 8/200	Paltenghe et al 705/41	2008/0010192 A1*	1/2008	Rackley, III et al 705/39
	Pugliese et al 705/26	2008/0010193 A1* 2008/0010196 A1*		Rackley, III et al 705/39
	2 Bala et al 725/34	2008/0010190 A1*		Rackley, III et al 705/40 Rackley, III et al 705/45
	2 Shore	2008/0010204 A1 2008/0010215 A1*		Rackley, III et al 705/70
	2 Agata 2 Young et al 705/41	2008/0017704 A1*		VanDeburg et al 235/380
	2 Lerner	2008/0027795 A1*		Medlin et al 705/14
	2 Miller	2008/0040265 A1*		Rackley, III et al 705/40
	2 Hammons	2008/0045172 A1*	2/2008	Narayanaswami
2002/0116269 A1* 8/2003	2 Ishida 705/14			et al 455/187.1
	2 Wolfe 455/414	2008/0046366 A1		Bemmel 225/200
	2 Walker et al 705/14	2008/0048022 A1* 2008/0051059 A1*		Vawter
	2 Kumar 3 Petrovich et al 705/26	2008/0051039 A1* 2008/0051142 A1*		Calvet et al
	B Barnes	2008/0052192 A1*		Fisher 705/26
	3 Yu	2008/0052233 A1*		Fisher et al 705/40
	3 Slyman et al 705/14	2008/0059329 A1*	3/2008	Luchene et al 705/26
	3 Kelley et al	2008/0126145 A1*		Rackley, III et al 705/7
2003/0087601 A1* 5/2003	3 Agam et al 455/39	2008/0133336 A1*		Altman et al 705/10
	3 Dutta	2008/0139155 A1		Boireau
	3 Lewis	2008/0140520 A1*		Hyder et al
	3 Swartz et al 235/472.02	2008/0148040 A1*	6/2008	
	3 O'Leary	2008/0167017 A1*	7/2008	Wentker et al 455/414.1
	8 Kanesaka 705/8	2008/0167961 A1*	7/2008	Wentker et al
	3 Abell 4 Nestor	2008/0167988 A1* 2008/0172274 A1*	7/2008	Sun et al
	+ Nestor 4 Cruz	2008/0172274 A1* 2008/0172285 A1*		Hurowitz et al 705/10
2007/0030038 AT 2/2004	T CIUZ	2006/01/2265 AT	112000	11010WILZ Ct al /05/10

## US 8,805,726 B2

### Page 3


#### 2010/0057619 A1\* 3/2010 Weller et al. ..... 705/67 (56)References Cited 2010/0063895 A1\* 3/2010 Dominguez et al. ..... 705/26 2010/0145835 A1\* 6/2010 Davis et al. ..... 705/30 U.S. PATENT DOCUMENTS 2010/0312694 A1\* 12/2010 Homeier-Beals ...... 705/39 2011/0055038 A1\* 2008/0172291 A1\* 7/2008 Hurowitz et al. ..... 705/14 2011/0320316 A1\* 2008/0172292 A1\* 7/2008 Hurowitz et al. ..... 705/14 2012/0030044 A1\* 2/2012 Hurst ...... 705/18 2008/0177668 A1 7/2008 Delean 2012/0150744 A1\* 6/2012 Carlson et al. ..... 705/44 2008/0207234 A1\* 8/2008 Arthur et al. ..... 455/466 2012/0215573 A1\* 2008/0208681 A1 8/2008 Hammad 2012/0220314 A1\* 2008/0208743 A1\* 8/2008 Arthur et al. ..... 705/41 2012/0265677 A1\* 10/2012 Rackley et al. ..... 705/41 2008/0208744 A1\* 8/2008 Arthur et al. ..... 705/41 2008/0208762 A1\* 2013/0013501 A1\* 1/2013 Rackley et al. ..... 705/41 Arthur et al. ..... 705/79 8/2008 2013/0054470 A1\* 2/2013 Campos et al. ..... 705/67 2008/0221997 A1\* 9/2008 Wolfe ...... 705/14 2008/0249938 A1\* 10/2008 Drake-Stoker ..... 705/44 OTHER PUBLICATIONS 2008/0255947 A1\* 10/2008 Friedman ...... 705/14 2008/0262928 A1\* 10/2008 Michaelis ..... 705/14 U.S. Appl. No. 11/933,351, Office Action mailed Oct. 3, 2008, 5 p. 2008/0274794 A1\* 11/2008 Mathieson ...... 463/25 U.S. Appl. No. 11/933,367, Office Action mailed May 27, 2010, 8 p. 2008/0275779 A1\* 11/2008 Lakshminarayanan ...... 705/14 U.S. Appl. No. 11/467,441, Office Action mailed May 27, 2009, 17 p. 2008/0294556 A1 11/2008 Anderson U.S. Appl. No. 12/592,581, Office Action mailed Jun. 4, 2010, 20 p. 2008/0305774 A1 12/2008 Ramakrishna 2009/0018913 A1\* U.S. Appl. No. 11/933,351, Office Action mailed Jul. 8, 2009, 7 p. 1/2009 Sarukkai et al. ..... 705/14 Rajan et al. ..... 455/445 2009/0061884 A1\* 3/2009 U.S. Appl. No. 11/939,821, Office Action mailed Aug. 17, 2010, 11 p. 2009/0063312 A1\* 3/2009 U.S. Appl. No. 11/933,351, Office Action mailed Aug. 18, 2010, 16 p. 2009/0076912 A1\* 3/2009 U.S. Appl. No. 11/933,321, Office Action mailed May 27, 2010, 11 p. 2009/0098825 A1 4/2009 Huomo Deena, M. Amato, "Mobile Rewards." Chain Store Age 82.5 (2006): 2009/0104888 A1\* 4/2009 Cox ...... 455/410 160, 161, 163. Hoover's Company Profiles; ProQuest Central. Web. 2009/0106112 A1\* Dalmia et al. ..... 705/14 4/2009 Oct. 5, 2012. 2009/0112747 A1\* Mullen et al. ..... 705/35 4/2009 "ViVOtech to Demonstrate Industry's First End-to-End Near Field 2009/0124234 A1\* Fisher et al. ..... 455/406 5/2009 Communication (NFC) Solution at the NRF Show." Business Wire: 1 2009/0132362 A1\* 5/2009 Fisher et al. ..... 705/14 Jan. 16, 2006. Business Dateline; Hoover's Company Profiles; 2009/0143104 A1\* 6/2009 Loh et al. ..... 455/558 ProQuest Central. Web. Oct. 5, 2012. 2009/0144161 A1\* 6/2009 Fisher ...... 705/16 2009/0177587 A1\*

\* cited by examiner

7/2009 Siegal et al. ..... 705/67

9/2009 Hammad et al. ...... 455/550.1

2009/0227281 A1\*

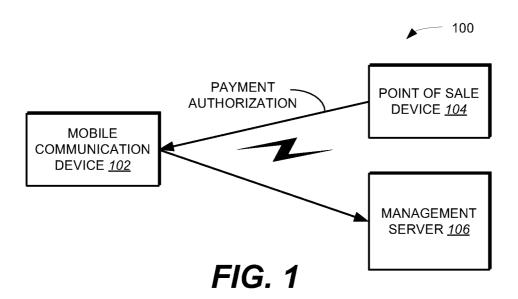

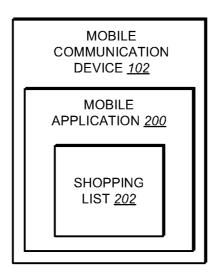


FIG. 2

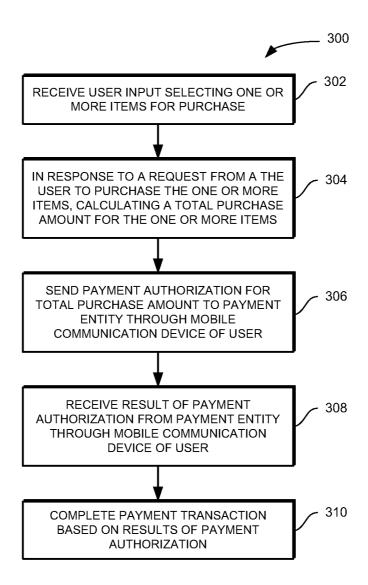


FIG. 3


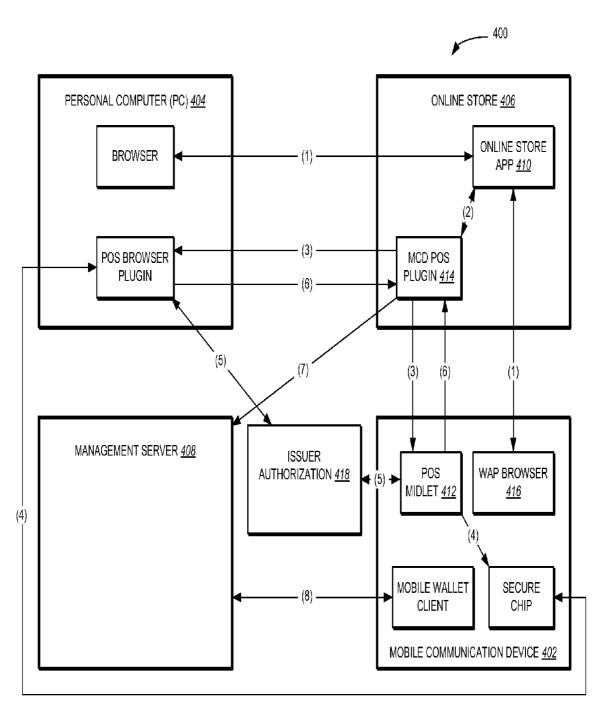


FIG. 4

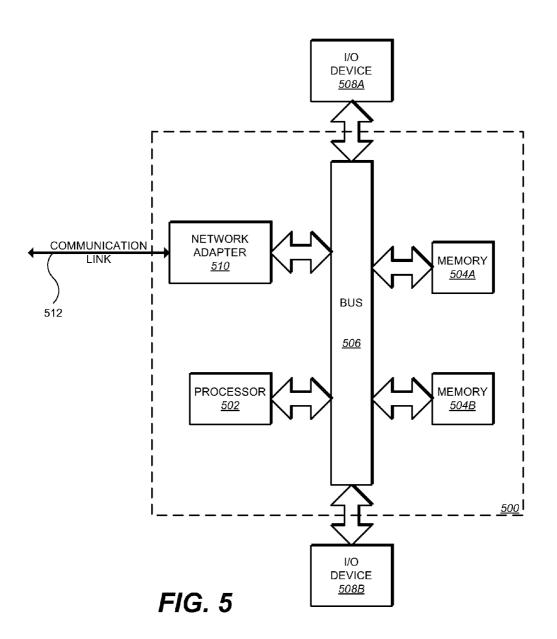

# ONLINE SHOPPING USING NFC AND A MOBILE DEVICE

# CROSS-REFERENCE TO RELATED APPLICATIONS

This application is a continuation of application Ser. No. 11/948,903, filed Nov. 30, 2007, titled METHOD AND SYSTEM FOR CONDUCTING AN ONLINE PAYMENT TRANSACTION USING A MOBILE COMMUNICATION DEVICE, all of which is incorporated by reference herein in its entirety.

### FIELD OF INVENTION

The present invention relates to data communications and wireless devices.

### BACKGROUND OF THE INVENTION

Mobile communication devices—e.g., cellular phones, personal digital assistants, and the like—are increasingly being used to conduct payment transactions as described in U.S. patent application Ser. No. 11/933,351, entitled 25 "Method and System For Scheduling A Banking Transaction Through A Mobile Communication Device", and U.S. patent application Ser. No. 11/467,441, entitled "Method and Apparatus For Completing A Transaction Using A Wireless Mobile Communication Channel and Another Communication 30 Channel, both of which are incorporated herein by reference. Such payment transactions can include, for example, purchasing goods and/or services, bill payments, and transferring funds between bank accounts.

### BRIEF SUMMARY OF THE INVENTION

In general, this specification describes a method and system for conducting an online payment transaction through a point of sale device. The method includes receiving input 40 from a user selecting an item for purchase through the point of sale device; calculating a total purchase amount for the item in response to a request from the user to purchase the item; and sending payment authorization for the total purchase amount from the point of sale device to a payment entity, in 45 which the payment authorization is sent to the payment entity via a mobile communication device of the user. The method further includes receiving a result of the payment authorization from the payment entity through the mobile communication device; and completing the payment transaction based 50 on the result of the payment authorization.

Particular implementations can include one or more of the following features. The point of sale device can be a desktop computer, a laptop computer, or a terminal. The mobile communication device can be a cellular phone, a wireless per- 55 sonal digital assistant (PDA), or a laptop computer. The cellular phone can be an NFC-enabled phone. Sending payment authorization for the total purchase amount from the point of sale device to a payment entity can include sending the payment authorization securely to the payment entity. The pay- 60 ment entity can be a person, a computer system, or a bank. The method can further include maintaining a shopping list on the mobile communication device of the user, in which the shopping list includes a listing of one or more items to be purchased by the user. The payment authorization can be an 65 authorization for payment with a credit card, a debit card, or a prepaid card.

2

The details of one or more implementations are set forth in the accompanying drawings and the description below. Other features and advantages will be apparent from the description and drawings, and from the claims.

## BRIEF DESCRIPTION OF THE DRAWINGS

FIG. 1 illustrates a block diagram of a communication system including a wireless mobile communication device and a management server in accordance with one implementation

FIG. 2 illustrates one implementation of the wireless mobile communication device of FIG. 1.

FIG. 3 is a method for conducting a payment transaction using a point of sale device in accordance with one implementation.

FIG. 4 illustrates a block diagram of a communication system including a wireless mobile communication device and an online store in accordance with one implementation.

FIG. 5 is a block diagram of a data processing system suitable for storing and/or executing program code in accordance with one implementation.

Like reference symbols in the various drawings indicate 25 like elements.

### DETAILED DESCRIPTION OF THE INVENTION

FIG. 1 illustrates one implementation of a communication system 100. The communication system 100 includes a handheld, wireless mobile communication device 102 a point-ofsale device 104 and a management server 106. In one implementation, the mobile communication device 102 includes a mobile application (discussed in greater detail below) that 35 permits a user of the mobile communication device 102 to conduct payment transactions. Payment transactions can include, for example, using contactless payment technology at a retail merchant point of sale (e.g., through point of sale device 104), using mobile/internet commerce (e.g., purchase tickets and products, etc.), storage of payment information and other digital artifacts (e.g., receipts, tickets, coupons, etc.), storage of banking information (payment account numbers, security codes, PIN's, etc.), and accessing banking service (account balance, payment history, bill pay, fund transfer, etc.), and so on. The mobile communication device 102 can be a cellular phone, a wireless personal digital assistant (PDA), a laptop computer, or other wireless communication device. The point of sale device 104 can be a desktop computer, laptop computer, terminal, or other device that is configured to receive user input selecting items for purchase or other transaction.

In one implementation, authorizations for payment transactions that are made through the point of sale device 104 are sent from the point of sale device 104 to an issuer authorization (e.g., management server 106) through the mobile communication device 102 (as shown in FIG. 1). In one implementation, an issuer authorization is a payment entity that either approves or disapproves a payment transaction. An issuer authorization can be, e.g., a person, computer system, bank (or other third party). One potential benefit of having payment authorizations flow through the mobile communication device 102 is that sensitive user information (e.g. account numbers, pin numbers, and/or identity information) need only be sent from the mobile communication device 102 directly to an issuer authorization. Such operation reduces the potential for identity theft and/or fraudulent purchases made through a point of sale device. For example, (in one imple-

mentation) payment authorizations cannot be sent to an issuer authorization if the mobile communication device 102 is turned off

FIG. 2 illustrates one implementation of the mobile communication device 102. The mobile communication device 5 102 includes a mobile application 200 that (in one implementation) is provided to the mobile communication device 102 through a remote server (e.g., management server 106). In one implementation, the mobile application is a Mobile Wallet application available from Mobile Candy Dish, Inc., of 10 Alameda, Calif. In one implementation, the mobile application is a hosted service, as described in U.S. patent application Ser. No. 11/939,821, entitled "Method and System For Securing Transactions Made Through a Mobile Communication Device", which is incorporated herein by reference. In one 15 implementation, the mobile application 200 is configured to send requests to the management server for artifacts based on user input, e.g., received through a keypad (not shown) of the mobile communication device 102. Requests to the management server 106 can also be automated, via proximity-based 20 services, e.g., consumer tapping (or in close proximity) an LBS/contactless/RFID enabled phone against a smart poster (RFID/Bluetooth/LBS enabled, etc.), kiosk, or other device.

In one implementation, the mobile application 200 running on the mobile communication device 102 is configured to 25 receive artifacts (e.g., advertisements, receipts, tickets, coupons, media, content, and so on) from the management server 106. In one implementation, the management server 106 sends artifacts to the mobile application based on user profile information and/or a transaction history (or payment trends) 30 associated with a user of the mobile communication device 102 as described in U.S. patent application Ser. No. 11/944, 267, entitled "Method and System For Delivering Information To a Mobile Communication Device Based On Consumer Transactions", which is incorporated herein by 35 reference.

In one implementation, the mobile communication device 102 is an NFC-enabled phone. The mobile communication device 102 can be NFC-enabled, for example, through an embedded chip or a sticker that is affixed to the cellular phone, 40 as described in U.S. application Ser. No. 11/933,321, entitled "Method and System For Adapting a Wireless Mobile Communication Device For Wireless Transactions", which is incorporated herein by reference. In one implementation, the NFC chip (or sticker) on the cellular phone can be used in 45 conjunction with a merchant's point of sale device as described in greater detail below.

For example, with reference to FIG. 4, in one implementation, the NFC chip (or sticker) on the cellular phone can communicate with NFC chips that are installed on the front of 50 PC's (TV's, Kiosks, or any other device) and serve as scanners/readers. In this implementation a mobile candy dish applet (e.g., MCD POS plugin 414) is installed on the consumer's computer (e.g., PC 404) which interfaces with the NFC chip on the PC. When a consumer (or user) is shopping 55 online and they are ready to pay for their products, the consumer opens his mobile wallet and selects one of the payment methods (e.g., credit card, debit card, prepaid card, etc.) from their mobile wallet. If a default card has been selected already, this step is not necessary. The consumer then waves their 60 phone over the NFC reader present on the PC 404. The consumer's payment credentials are transferred from the phone to the merchant website (e.g., online store application 410) using a communication protocol between the chip in the phone and the chip in the PC, which can be radio frequency for example. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the

4

coupon, save the coupon for a future use (against a larger purchase for example), or have the coupon automatically applied during the transaction and the transaction amount is updated. After the consumer enters any necessary validation information (e.g., pin) to provide a multi-factor authentication and confirms the transaction, the online purchase is processed as normal by the merchant's online processor. The mobile wallet can retrieve transaction data, account balance from the management server 408.

In one implementation, the mobile communication device 102 is a non NFC-enabled phone. In this implementation, the consumer connects his phone to the PC 404 via some non radio frequency method (e.g., IR, Bluetooth, USB cable, etc.). When a consumer is shopping online and they are ready to pay for their products, the consumer opens his mobile wallet and selects one of the payment methods (e.g., credit card, debit card, prepaid card, etc.) from their mobile wallet. If a default card has been selected already, this step is not necessary. The consumer then pushes, e.g., a "Buy now" button and the consumer's payment credentials are transferred from the phone to the merchant website (e.g., online store application 410) using the protocol between the phone and the PC 404 which can be radio frequency, for example. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use, or have the coupon automatically applied during the transaction and the transaction amount is updated. After the consumer enters any necessary validation information (e.g., pin) to provide multi-factor authentication and confirms the transaction, the online purchase is processed as normal by the merchant's online processor. The mobile wallet can retrieve transaction data and account balance from the management server 408.

In one implementation, the management server 408 and merchant portal (e.g., online store 408) are maintained by trusted parties and use an encrypted tunnel to transfer financial data. When the consumer is ready to pay for their online product, they enter their cell phone number on the merchant portal. The merchant portal (which has an MCD applet (e.g., MCD POS plugin 414) installed on its server) securely connects to the management server 408 (that in one implementation is maintained by Mobile Candy Dish (MCD)). In one implementation, the management server 408 identifies the consumer through their cell phone number, and verifies the consumer's authenticity by sending a unique transaction code to the consumer mobile wallet on their cell phone. The consumer then enters this unique transaction code onto the merchant's web portal. The merchant portal sends this transaction number to the management server 408 for authentication. Upon authentication, the consumer's virtual wallet and payment methods (e.g., credit card, debit card, prepaid card, etc.) are securely retrieved from the management server 408 and are displayed to the consumer in a window on a website associated with the merchant portal. The consumer selects one of these payment methods to pay for their transaction. If a default card has been selected already, this step is not necessary. If the consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use, or have the coupon automatically applied during the transaction and the transaction amount is updated. After the consumer enters any necessary validation information to provide a multi-factor authentication and confirms the transaction, the online purchase is processed as normal by the merchant's online processor. The mobile wallet can retrieve transaction data, account balance from the management server 408.

Referring to FIG. 2, in one implementation, the mobile application 200 maintains a shopping list 202 for a consumer. Accordingly, consumers have the ability to store their shopping list in their mobile wallet and add, delete, or change items on their shopping list either in offline or online mode. In 5 one implementation, consumers are sent coupons based on items on their shopping list, preferences, previous shopping history, proximity to the physical retail store, or a combination of these parameters, as discussed in application Ser. No. 11/944,267, which is incorporated by reference above. If the 10 consumer has coupons in their mobile wallet the consumer can either elect to manually apply the coupon, save the coupon for a future use, or have the coupon automatically applied during the transaction and the transaction amount is updated. When a consumer wants to order the items on their shopping 15 list via an on online merchant (in contrast to a physical retail store), the consumer can logon to the merchant portal and electronically transmit their shopping list to the merchant portal either by waving their phone over NFC enabled PC's or some other connection such as IR, bluetooth, USB, or the like. 20

FIG. 3 illustrates a method 300 for conducting a payment transaction using a point of sale device (e.g., point of sale device 104). User input is received selecting one or more items for purchase (e.g., at the point of sale device) (step 302). In general, the transaction being made at the point of sale 25 device can be any type of transaction that involves the exchange or transfer of funds—e.g., the transaction can be a payment transaction, a fund transfer, or other type of transaction. In response to a request from the user to purchase the one or more items, a total purchase amount for the one or 30 more items is calculated (e.g., by the point of sale device) (step 304). If the user has coupons in their mobile wallet the user can either manually apply the coupon or have the coupon automatically applied during the transaction and the transaction amount is updated. The user request to purchase an item 35 can be received, e.g., by a user clicking on a "buy now" icon that is displayed on a graphical user interface of the point of sale device. Payment authorization for the total purchase amount is sent to a payment entity through a mobile commuauthorization is received at the point of sale device from the payment entity via the mobile communication device (step 308). The payment transaction is completed based on the result of the payment authorization (step 310). If the payment transaction was authorized by the payment entity, then the 45 sale of the items through the point of sale device is completed. Otherwise, if the payment transaction was not authorized by the payment entity, then the point of sale device terminates the payment transaction.

FIG. 4 illustrates an example payment transaction being 50 made in a communication system 400 in accordance with one implementation. The communication system 400 includes a mobile communication device 402, a personal computer (PC) 404, an online store 406, and a core (or datastore) 408. As indicated by interaction (1), a user (or customer), using a 55 phone (e.g., mobile communication device 402 or personal computer 404), browses an online store website (online store application 410) and finds an item that the customer wishes to purchase. This could also be a purchase made through a midlet application (POS midlet 412) residing on the mobile 60 communication device 402. The user then goes to, e.g., a checkout of the online store 406 make a purchase. If the user has coupons in their mobile wallet the user can either manually apply the coupon or have the coupon automatically applied during the transaction and the transaction amount is 65 updated. When it comes time to authorize the purchase, (in one implementation) the user is given an option to purchase

with the mobile communication device 402. In one implementation, the mobile communication device 402 is an NFCequipped phone (or NFC phone).

In interaction (2), when the user chooses to purchase with the mobile communication device 402, the online store application 410 sends the transaction information for authorization to the POS vendor plugin (e.g., MCD POS plugin 414). In one implementation, the POS vendor plugin is installed in the merchant's online store and enables the merchant to accepts MCD Blaze payments as an alternative form of payment, similar to accepting credit cards for payment. As shown by interaction (3), the POS vendor plugin formats, encrypts, and cryptographically signs the purchase authorization request which is sent via a secure SSL link (e.g., HTTPS, Bluetooth, IR, USB, or other suitable protocol) established by the browser/web application 416 back to the mobile communication device 402. As with the first scenario, all communications is over secure channels. (It may be required that the mobile wallet application be opened prior to beginning a phone online purchase.) The POS midlet 412 is a component of the mobile wallet application that executes PayPass or other payment authorization protocol between itself and the SE payment applications on the mobile communication device 402 (interaction (4)). The results of the request are sent back to the POS vendor plugin.

As shown by interaction (5), the POS midlet 412 then forwards the properly formatted authorization request to a payment entity (e.g., issuer authorization 418) for authorization. The results of the request are then sent back to the POS component of the mobile wallet. Through interaction (6), the POS midlet 412 then forwards the results back to the MCD POS plugin 414 to complete the purchase. The MCD POS plugin 414 then forwards the purchase transaction information to the management server 408 for later customer viewing (interaction (7)). As indicated by interaction (8), users (or customers) will then be able to query the management server 408 and immediately obtain purchase information, either by

One or more of method steps described above can be pernication device of the user (step 306). A result of the payment 40 formed by one or more programmable processors executing a computer program to perform functions by operating on input data and generating output. Generally, the invention can take the form of an entirely hardware embodiment, an entirely software embodiment or an embodiment containing both hardware and software elements. In one implementation, the invention is implemented in software, which includes but is not limited to firmware, resident software, microcode, etc. Furthermore, the invention can take the form of a computer program product accessible from a computer-usable or computer-readable medium providing program code for use by or in connection with a computer or any instruction execution system. For the purposes of this description, a computerusable or computer readable medium can be any apparatus that can contain, store, communicate, propagate, or transport the program for use by or in connection with the instruction execution system, apparatus, or device. The medium can be an electronic, magnetic, optical, electromagnetic, infrared, or semiconductor system (or apparatus or device) or a propagation medium. Examples of a computer-readable medium include a semiconductor or solid state memory, magnetic tape, a removable computer diskette, a random access memory (RAM), a read-only memory (ROM), a rigid magnetic disk and an optical disk. Current examples of optical disks include compact disk—read only memory (CD-ROM), compact disk-read/write (CD-R/W) and DVD.

FIG. 5 illustrates a data processing system 500 suitable for storing and/or executing program code. Data processing sys-

tem 500 includes a processor 502 coupled to memory elements 504A-B through a system bus 506. In other implementations, data processing system 500 may include more than one processor and each processor may be coupled directly or indirectly to one or more memory elements through a system bus. Memory elements 504A-B can include local memory employed during actual execution of the program code, bulk storage, and cache memories that provide temporary storage of at least some program code in order to reduce the number of times the code must be retrieved from bulk storage during execution. As shown, input/output or I/O devices 508A-B (including, but not limited to, keyboards, displays, pointing devices, etc.) are coupled to data processing system 500. I/O devices 508A-B may be coupled to data processing system 15 500 directly or indirectly through intervening I/O controllers

In one implementation, a network adapter 510 is coupled to data processing system 500 to enable data processing system 500 to become coupled to other data processing systems or 20 ment is embedded within the body of the mobile device. remote printers or storage devices through communication link 512. Communication link 512 can be a private or public network. Modems, cable modems, and Ethernet cards are just a few of the currently available types of network adapters.

Although the present invention has been particularly 25 described with reference to implementations discussed above, various changes, modifications and substitutes are can be made. Accordingly, it will be appreciated that in numerous instances some features of the invention can be employed without a corresponding use of other features. Further, varia-30 tions can be made in the number and arrangement of components illustrated in the figures discussed above.

What is claimed is:

- 1. A mobile device comprising:
- a mobile device display;
- a mobile device memory configured to maintain a non browser based mobile application, the mobile application including a virtual shopping list of items;
- a mobile device processor configured to execute the mobile 40 application;
- a secure element coupled to the mobile device, the secure element including:
  - a secure element memory storing a near field communication (NFC) application, the secure element memory 45 configured to receive a user identification code and an item selection from the virtual shopping list of the mobile application; and
  - a secure element processor configured to execute the NFC application, operating at an application layer 50 above a physical layer in response to an NFC interaction triggered from a terminal NFC transceiver included in a point of sale (POS) terminal to the secure element, without communication with the mobile device, and
  - wherein the NFC application transmits, using a first communication channel configured for NFC, transaction data including the user identification code and the selected item for purchase to the POS terminal for subsequent processing at a management server, the 60 user identification code and selected item for purchase received from the mobile application prior to the NFC interaction.
- 2. The mobile device of claim 1, wherein the POS terminal is a desktop computer, a laptop computer, or a thin client, and 65 wherein the POS terminal includes an NFC chip configured as an NFC scanner and an NFC reader.

- 3. The mobile device of claim 1, further comprising automatically applying a coupon during the near field communication transaction.
- 4. The mobile device of claim 1 further comprising sending a receipt, ticket, or coupon after the transaction from the management server to the mobile device.
- 5. The mobile device of claim 1, wherein the secure element is physically coupled to the mobile device but electrically decoupled from electrical interior components of the mobile device.
- 6. The mobile device of claim 1, wherein the secure element is physically coupled to the mobile device and electrically coupled to electrical interior components of the mobile
- 7. The mobile device of claim 1, wherein the secure element is included within the body of a memory card configured for placement in a memory card slot in the mobile device.
- **8**. The mobile device of claim **1**, wherein the secure ele-
- 9. The mobile device of claim 1, wherein a security tool is implemented at the mobile application, and wherein implementation of the security tool comprises prompting the user to login to the mobile device, using biometrics to authenticate the user before authorizing a transaction, disabling use of the mobile application, prompting the user to enter a payment limit PIN in response to a pending purchase exceeding a pre-determined amount, temporarily disabling the secure element, permanently disabling the secure element, deleting all cached data stored in the mobile device memory, and/or storing encrypted security codes on the mobile device, wherein disabling the secure element prevents near field communication payments, coupon redemption, and ticket redemption.
  - 10. A method comprising:
  - maintaining a non browser based mobile application in a mobile device memory included in a mobile device, the mobile application including a virtual shopping list of items, wherein the mobile application is associated with a near field communication (NFC) application stored in a secure element memory included in a secure element coupled to the mobile device, and wherein the NFC application is configured to receive a user identification code and an item selection from the virtual shopping list of the mobile application; and
  - executing by a secure element processor included in the secure element the NFC application, operating at an application layer above a physical layer in response to an NFC interaction triggered from a terminal NFC transceiver included in a POS terminal to the secure element, without communication with the mobile device, and
  - wherein the NFC application sends, using a first communication channel configured for NFC, transaction data including the user identification code and the selected item for purchase to the POS terminal for subsequent processing at a management server, the user identification code and the selected item for purchase received from the mobile application prior to the NFC interaction.
- 11. The method of claim 10, wherein the POS terminal is a desktop computer, a laptop computer, or a thin client, and wherein the POS terminal includes an NFC chip configured as an NFC scanner and an NFC reader.
- 12. The method of claim 10, further comprising automatically applying a coupon during the near field communication transaction.
- 13. The method of claim 10 further comprising sending a receipt, ticket, or coupon after the transaction from the management server to the mobile device.

14. The method of claim 10, wherein the secure element is physically coupled to the mobile device but electrically decoupled from electrical interior components of the mobile device.

9

- 15. The method of claim 10, wherein the secure element is 5 physically coupled to the mobile device and electrically coupled to electrical interior components of the mobile device.
- **16**. The method of claim **10**, wherein the secure element is included within the body of a memory card configured for 10 placement in a memory card slot in the mobile device.

\* \* \* \* \*